

MC-AP™ Type MC All Purpose THHN/THWN Circuit Size Copper Conductor 277/480 Colors

Copper THHN Insulated Conductors. Full-Sized Aluminum Equipment Grounding/Bonding Conductor. UL Listed 600 Volt. Rated VW1. Lightweight Aluminum Interlocked Armor is Part of Equipment Bonding/Grounding Path.

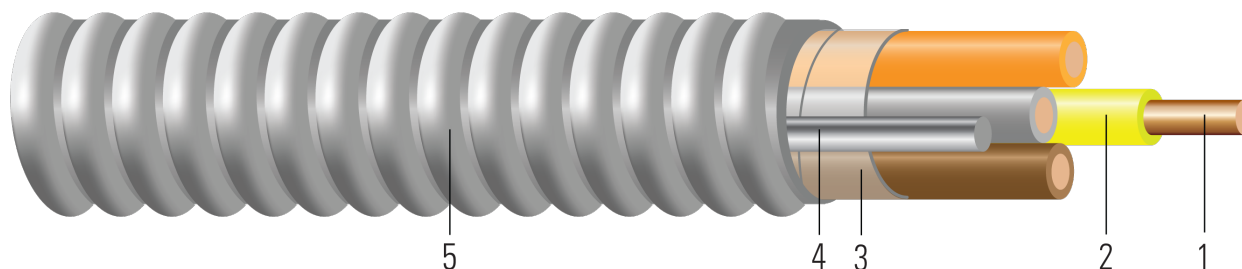


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

- Conductor:** Solid or 19 strands class C compressed copper per ASTM B3 and ASTM B8
- Insulation:** All phases are insulated with Polyvinyl Chloride with Nylon Sheath Type THHN/THWN
- Binder:** Mylar tape
- Ground:** Full-sized bare 8000 series aluminum grounding/bonding conductor. Armor and bare aluminum conductor form the equipment ground path.
- Armor:** Aluminum Interlocked Armor

APPLICATIONS AND FEATURES:

Southwire Armorlite® Type MC Cable is suitable for use as follows:

- Branch, feeder and service power distribution in commercial, industrial, institutional, and multi- residential buildings.
- Fished or embedded in plaster.
- Concealed or exposed installations.
- Environmental air-handling spaces per NEC 300.22 (C).
- Places of Assembly per NEC 518.4 and theaters per NEC 520.5.
- Installation in cable tray and approved raceways.
- Under raised floors for information technology equipment conductors and cables per NEC 645.5(D) & 645.5(D)(2)
- Class I Div. 2, Class II Div 2, & Class III Div. 1 Hazardous Locations.
- Binder tape with print legend wrapped around assembly.
- Type THHN/THWN rated 90°C Dry.

Southwire Armorlite® Type MC Cable - meets or exceeds the following requirements:

- UL Online Product Guide Info - Metal-Clad Cable (PJAZ) (www.ul.com)
- Federal Specification A-A59544 (formerly J-C-30B)
- NFPA 70 (National Electrical Code), Article 330
- Listed for use in UL 1, 2 and 3 Hour Through Penetration Firestop Systems

SPECIFICATIONS:

- ASTM B3 Standard Specification for Soft or Annealed Copper Wire
- ASTM B8 Concentric-Lay-Stranded Copper Conductors
- UL 83 Thermoplastic Insulated Wires and Cables



Southwire Company, LLC | One Southwire Drive, Carrollton, GA 30119 | www.southwire.com



Southwire

**CABLETECH
SUPPORT™**

Services

- UL 1569 Metal-Clad Cables
- UL 1479 Standard for Safety Fire Tests of Penetration Firestops
- UL 1685 FT4 Vertical-Tray Fire Propagation and Smoke Release Test
- IEEE 1202 FT4 Flame Test (70,000) BTU/hr Vertical Tray Test
- Buy American: Compliant with Buy American Requirements, found in 49 U.S.C. § 5323(j); specify “Made in the USA Only!” when ordering to ensure your project receives American made products.
- REACH - European Community Regulation

SAMPLE PRINT LEGEND:

E96627 MASTER-DESIGN {UL} TYPE MC XX AWG THHN OR THWN CDRS FOR USE IN CABLE TRAYS 600 VOLTS -- ARMOR IS EQUIPMENT GROUNDING PATH COMPONENT

Table 1 – Weights and Measurements

Stock Number	Cond. Size	Conductor Number	Color	Conductor Stranding	Insulation Thickness	Ground Size x Num	Neutral Size x Num	Diameter Over Armor	Overall Weight
	AWG/ Kcmil				mils	No. x AWG	No. x AWG	inch	lbs/1000ft
555539◇	12	2	YEL/GY	Solid	20	1 x 10	1 x 12	0.493	92
555726◇	12	2	BN/GY	Solid	20	1 x 10	1 x 12	0.493	92
555538◇	12	2	OE/GY	Solid	20	1 x 10	1 x 12	0.493	92
555733◇	10	2	BN/GY	Solid	25	1 x 8	1 x 10	0.555	129
555541◇	12	3	BN/YW/GY	Solid	20	1 x 10	1 x 12	0.512	119
555728◇	12	3	BN/OE/GY	Solid	20	1 x 10	1 x 12	0.512	119
555735◇	10	3	BN/OE/GY	Solid	25	1 x 8	1 x 10	0.58	168
555731◇	12	4	BN/OE/YW/GY	Solid	20	1 x 10	1 x 12	0.544	145
555737◇	10	4	BN/OE/YW/GY	Solid	25	1 x 8	1 x 10	0.619	208
558793◇	12	2	YEL/GY	19	20	1 x 10	1 x 12	0.507	96
558743◇	12	2	BN/GY	19	20	1 x 10	1 x 12	0.497	94
558790◇	12	2	OE/GY	19	20	1 x 10	1 x 12	0.507	95
558745◇	12	3	BN/OE/YW	19	20	1 x 10	1 x 12	0.528	122
558747◇	12	4	BN/OE/YW/GY	19	20	1 x 10	1 x 12	0.562	149

All dimensions are nominal and subject to normal manufacturing tolerances

◇ Cable marked with this symbol is a standard stock item

Note: Conductor number = number of phase conductors plus neutral.



Table 2 – Electrical and Engineering Data

Stock Number	Cond. Size	Min. Bend Radius	DC Resistance at 25°C	AC Resistance at 75°C	Allowable Ampacity Raceway 60°C [†]	Allowable Ampacity Raceway 75°C [†]	Allowable Ampacity Raceway 90°C [†]
	AWG/Kcmil	Inches	Ω/1000ft	Ω/1000ft	Amp	Amp	Amp
555539◇	12	3.4	1.662	2.002	20	25	30
555726◇	12	3.4	1.662	2.002	20	25	30
555538◇	12	3.4	1.662	2.002	20	25	30
555733◇	10	3.8	1.040	1.253	30	35	40
555541◇	12	3.5	1.662	2.002	20	25	30
555728◇	12	3.5	1.662	2.002	20	25	30
555735◇	10	4.0	1.040	1.253	30	35	40
555731◇	12	3.8	1.662	2.002	16	20	24
555737◇	10	4.3	1.040	1.253	24	28	32
558793◇	12	3.5	1.662	2.002	20	25	30
558743◇	12	3.4	1.662	2.002	20	25	30
558790◇	12	3.5	1.662	2.002	20	25	30
558745◇	12	3.6	1.662	2.002	20	25	30
558747◇	12	3.9	1.662	2.002	16	20	24

[†] Ampacities have been adjusted for more than Three Current-Carrying Conductors

[†] Ampacities based upon 2023 NEC Table 310.16 and do not take into account the overcurrent protection limitations in NEC 240.4(D) of 15 Amps for 14 AWG CU, 20 Amps for 12 AWG CU, and 30 Amps for 10 AWG CU (independent of the conductor temperature rating and stranding). Also, see NEC sections 310.15 and 110.14(C) for additional requirements.

