



Broadband Coax - RG6, RG59 and 18/2 Siamese

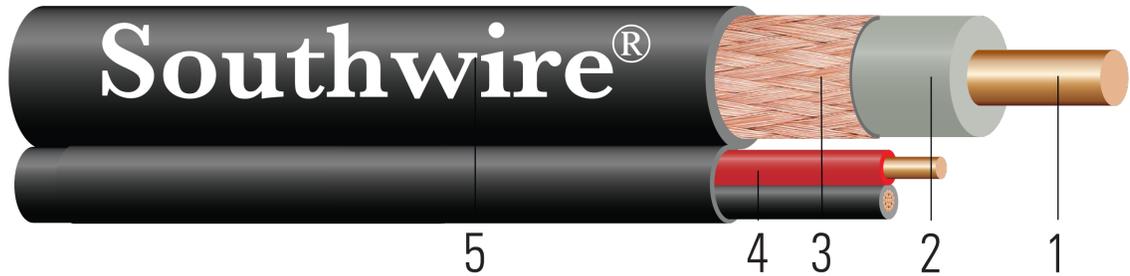


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

Non-Plenum Rated

1. **Conductor:** Bare copper or copper clad steel
2. **Insulation:** Polyethylene
3. **Shield:** Copper braid shielded
4. **Signal:** 2/C #18 Black, Red
5. **Jacket:** Polyvinyl Chloride PVC.

Plenum Rated

1. **Conductor:** Bare copper or copper clad steel
2. **Insulation:** Foamed Fluoropolymer
3. **Shield:** Copper braid shielded
4. **Signal:** 2/C #18 Black, Red
5. **Jacket:** Polyvinyl Chloride PVC.

APPLICATIONS AND FEATURES:

CATV Applications for distributing television signals, using "F" connectors, ALUMINUM BRAID CCTV Applications for surveillance; Connecting security cameras, DVR or monitor using "BNC" connectors, COPPER BRAID

- Flame Test Non-Plenum: UL 1685/CSA FT1
- Flame Test Plenum: NFPA 262/CSA FT6

SPECIFICATIONS:

- UL 1685 Vertical-Tray Fire Propagation and Smoke Release Test

SAMPLE PRINT LEGEND:

{SQFTG} SOUTHWIRE® SIGNAL® 993267 1C18 AWG RG 6/U 2C 18 AWG E57497 (UL) CM/CL2 SUN RES

{SQFTG} SOUTHWIRE® SIGNAL® 993265 1C18 AWG RG 6/U 2C 18 AWG TYPE CL2P/CMP C(ETL)US -- TYPE CMP FT6

{SQFTG} SOUTHWIRE® SIGNAL® 993254 1C20 AWG RG 59/U 2C18 AWG DIRECT BURIAL SUN RES



Table 1 – Physical and Electrical Data

Stock Number	Cable Type	Rating	Cond. Size AWG	Cond. Number No.	Cond. Type	Cond. Strands strands	Insul. Thickness mil	Approx. OD inch	Approx. Weight lb /1000ft	Shield Type
RG59										
99511	RG59	CM	20	1	BC	Solid	55	0.236 x 0.425	46	Copper Braid

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item