

## 600V Tinned Cu Cross Linked Polyethylene Pairs POS

Instrumentation Cable 600 Volt tinned Copper Conductors cross linked polyethylene Insulated Singles with Overall Shield POS. Thermoset chlorinated polyethylene CPE-TS Jacket Heat, Moisture and Sunlight Resistant. For Direct Burial-Sunlight Resistant.

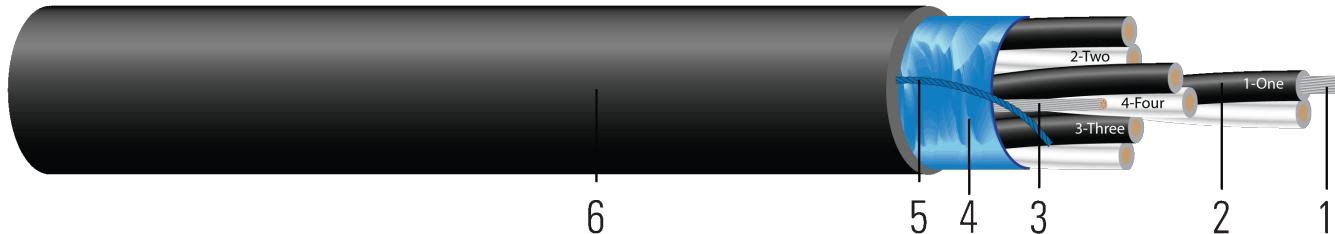


Image not to scale. See Table 1 for dimensions.

### CONSTRUCTION:

- Conductor:** Class B tinned stranded copper per ASTM B33
- Insulation:** Cross linked polyethylene XLPE. Black/White alpha-numeric print alternate and inverted. 1-ONE, 2-TWO
- Overall Drain Wire:** Tinned Copper 22 AWG.
- Overall Shielded:** 100% coverage aluminum/polyester foil shield with a drain wire.
- Rip Cord:** Rip cord under jacket for ease of removal
- Jacket:** Black sunlight resistant thermoset chlorinated polyethylene CPE-TS

### APPLICATIONS AND FEATURES:

Southwire's Instrumentation Cables are suitable for installations in wet or dry locations at 90°C for operation and interconnection of protective and signaling devices and for general use in manufacturing, industrial and commercial distribution systems. Cables are constructed with 7 strand tinned copper conductors insulated with fire retardant cross linked polyethylene FR-XLPE insulation. The paired conductors are colored black, white, and alpha-numeric printed. The overall assembly is covered with an aluminum polyester foil with 100% coverage and a tinned drain wire. The cable is suited for use in cable trays, raceways, conduit, aerial (when supported with a messenger). For direct burial and sunlight resistant. The jacket is black thermoset chlorinated polyethylene CPE-TS with a nylon ripcord for easy removal.

### SPECIFICATIONS:

- ASTM B33 Standard Specification for Tin-Coated Soft or Annealed Copper Wire
- ICEA S-95-658 (NEMA WC70) Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy

### SAMPLE PRINT LEGEND:

{SQFTG} SOUTHWIRE{R} XX AWG TIN CU 1 PAIR FR-XLPE CDRS SHIELDED 90{D}C WET OR DRY CPE-TS JKT 600V SUN RES

**Table 1 – Weights and Measurements**

| Stock Number | Cond. Size    | Number of Pairs | Diameter Over Conductor | Insul. Thickness | Jacket Thickness | Approx. OD | Approx. Weight | Min Bending Radius | DC Resistance @ 25°C |
|--------------|---------------|-----------------|-------------------------|------------------|------------------|------------|----------------|--------------------|----------------------|
|              | AWG/<br>Kcmil | pair            | inch                    | mil              | mil              | inch       | lb/1000ft      | inch               | Ω/1000ft             |
| 606957       | 14            | 1               | 0.070                   | 30               | 45               | 0.379      | 76             | 3.0                | 2.631                |

All dimensions are nominal and subject to normal manufacturing tolerances





◊ Cable marked with this symbol is a standard stock item

Note: 1 Pair is not TC-ER Rated

**Table 2 – Weights and Measurements (Metric)**

| Stock Number | Cond. Size    | Number of Pairs | Diameter Over Conductor | Insul. Thickness | Jacket Thickness | Approx. OD | Approx. Weight | Min Bending Radius | DC Resistance @ 25°C |
|--------------|---------------|-----------------|-------------------------|------------------|------------------|------------|----------------|--------------------|----------------------|
|              | AWG/<br>Kcmil | pair            | inch                    | mm               | mm               | mm         | lb/km          | mm                 | Ω/km                 |
| 606957       | 14            | 1               | 0.070                   | 0.76             | 1.14             | 9.63       | 113            | 76.20              | 8.63                 |

**Typical Electrical Specifications for Each Pair**

| Size<br>AWG | Capacitance<br>pF/ft | Inductance<br>μH/ft | 18 |
|-------------|----------------------|---------------------|----|
|             |                      |                     | 16 |
|             | 40.66                | 0.0957              |    |
|             | 48.51                | 0.0895              |    |

