



RW90 Copper Circuit Sizes (14, 12 & 10 AWG)

Copper Conductor, 600V, 90°C MAX, -40°C MIN. All Sizes and Colors are Sunlight Resistant.

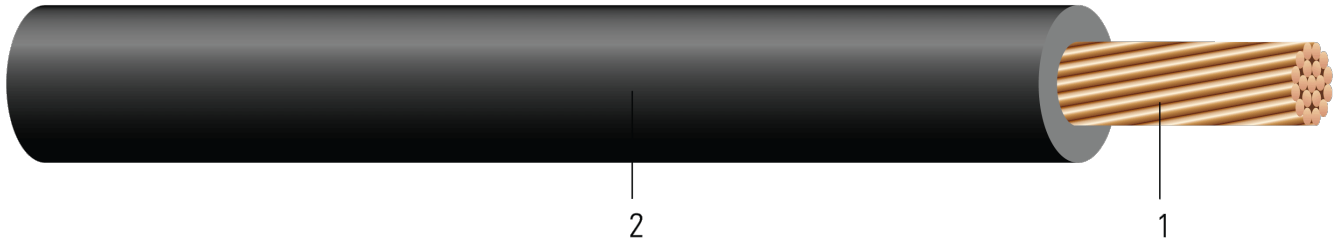


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

- Conductor:** Class B compressed stranded bare copper per ASTM B3 and ASTM B8
- Insulation:** Cross Linked Polyethylene (XLPE)

APPLICATIONS AND FEATURES:

Single copper conductor with low temperature, moisture resisting XLPE (cross linked polyethylene) insulation. All sizes are Sunlight Resistant in all colors and packaging. This product meets the current RoHS requirements. No lead is added or used in manufacturing.

SPECIFICATIONS:

- ASTM B3 Soft or Annealed Copper Wire
- ASTM B8 Concentric-Lay-Stranded Copper Conductors
- CSA C22.2 No. 38 Thermoset-insulated wires and cables
- CSA SUN RES - for Sunlight Resistant rating

SAMPLE PRINT LEGEND:

SOUTHWIRE& LL90458 (CSA) 12 AWG CU RW90 XLPE 600 VOLTS (-40{D}C) SR

Table 1 – Weights and Measurements

Stock Number	Cond. Size	Cond. Number	Strand	Insul. Thickness	Insulation Color	Approx. OD	Approx. Weight	Min Bending Radius	Max Pull Tension	DC Resistance @ 25°C	AC Resistance @ 75°C	Inductive Reactance @ 60Hz	Allowable Ampacity In Raceway 90°C†
	AWG/ Kcmil		No.	mil		inch	lb/ 1000ft	inch	lb	Ω/1000ft	Ω/1000ft	Ω/1000ft	Amp
956250◇	14	1	Solid	30	BN	0.128	16	0.500	32	2.631	3.170	0.058	25

All dimensions are nominal and subject to normal manufacturing tolerances

◇ Cable marked with this symbol is a standard stock item

†Ampacities derived from the 2015 Canadian Electrical Code - Table 1 - For single conductor in free air and based on an ambient temperature of 30°C. - Table 2 - for Cable in Conduit. Not more than 3 aluminum conductors in a conduit and based on an ambient temperature of 30°C.

TBA stock codes are estimations only and actual product may vary. Please wait until a stock code is assigned to purchase connectors and/or fittings.

Table 2 – Weights and Measurements (Metric)

956250◇	14	1	Solid	0.76	BN	3.25	24	12.70	142	8.63	10.40	0.1903	25
---------	----	---	-------	------	----	------	----	-------	-----	------	-------	--------	----

All dimensions are nominal and subject to normal manufacturing tolerances

◇ Cable marked with this symbol is a standard stock item





†Ampacities derived from the 2015 Canadian Electrical Code - Table 1 - For single conductor in free air and based on an ambient temperature of 30°C. - Table 2 - for Cable in Conduit. Not more than 3 aluminum conductors in a conduit and based on an ambient temperature of 30°C.

TBA stock codes are estimations only and actual product may vary. Please wait until a stock code is assigned to purchase connectors and/or fittings.





Table 3 - Stock Code Colors

Size (Strand)	Color	Stock Number
14 (Solid)	BK	956110
14 (Solid)	RD	956177
14 (Solid)	WE	956144
14 (Solid)	BN	956250
14 (Solid)	YW	956276
14 (Solid)	GN	956201
14 (Solid)	BE	956235
14 (Solid)	OE	557917
14 (7)	GN	955617
14 (7)	RD	955245
14 (7)	BE	955666
14 (7)	YW	955708
14 (7)	BK	951731
14 (7)	OE	557924
14 (7)	BN	955682
12 (Solid)	OE	557861
12 (Solid)	BK	956102
12 (Solid)	RD	956169
12 (Solid)	BE	956227
12 (Solid)	BN	956243
12 (Solid)	YW	956268
12 (Solid)	WE	956136
12 (Solid)	GN	956193
12 (7)	BK	951749
12 (7)	GN	955609
12 (7)	BE	955658
12 (7)	BN	955674
12 (7)	RD	955237
12 (7)	OE	557923
12 (7)	YW	955690
10 (Solid)	RD	956151
10 (Solid)	OE	557930
10 (Solid)	BK	956094
10 (Solid)	BN	557929
10 (Solid)	WE	956128
10 (Solid)	GN	956185
10 (Solid)	BE	956219
10 (Solid)	YW	557931
10 (7)	BK	951756
10 (7)	BE	955641
10 (7)	OE	557921
10 (7)	GN	955591
10 (7)	BN	557920
10 (7)	YW	557922
10 (7)	RD	955229

