1/C CU EPR Medium Voltage Non-Shielded Jumper & Switchgear Cable

Single Conductor Flexible Conductor with an EPR Insulation Non-Shielded Jumper Cable

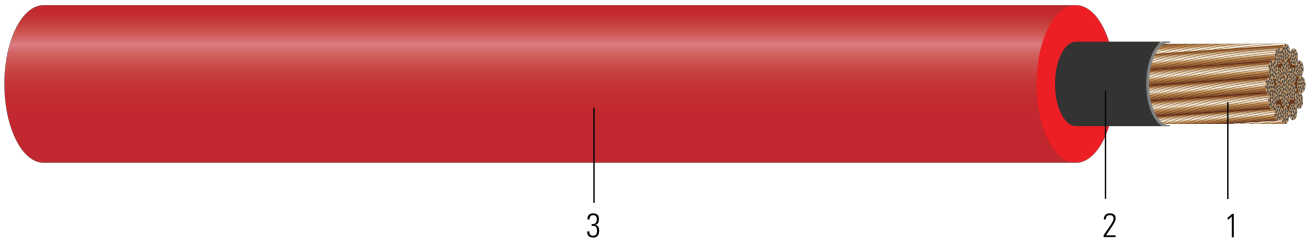


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

1. **Conductor:** Flexible rope lay stranded annealed bare or tinned copper
2. **Conductor Shield:** Nylon semi-conducting tape, helically applied
3. **Insulation:** Heat, moisture, and ozone resistant Ethylene Propylene Rubber(EPR)

APPLICATIONS AND FEATURES:

Southwire's medium voltage non-shielded jumper and switchgear cable is a flexible power cable that is intended for use in substations installed on insulators and inside switchgear isolated from ground and where a non-shielded flexible cable is desired. These cables are capable of operating continuously at a conductor temperature not in excess of 90°C.

This cable is rated up to 40KV and is not UL listed. See Table 2 for installation guidelines

SPECIFICATIONS:

- ASTM B33 Standard Specification for Tin-Coated Soft or Annealed Copper Wire
- ASTM B172 Standard Specification for Rope-Lay-Stranded Copper Conductors Having Bunch-Stranded Copper Conductors

SAMPLE PRINT LEGEND:

SOUTHWIRE® XXX SIZE NON-SHIELDED FLEXIBLE JUMPER AND SWITCHGEAR CABLE NON-UL

Table 1 – Weights and Measurements

Stock Number	Cond. Size	Strand Count	Diameter Over Conductor	Insul. Thickness	Insulation Color	Approx. OD	Copper Weight	Approx. Weight
	AWG/Kcmil	No. of Strands	inch	mil		inch	lb/1000ft	lb/1000ft
569424	2	168	0.29	210	RD	0.753	169	177
569423	1/0	259	0.379	210	RD	0.84	320	548
569425	2/0	324	0.4	220	RD	0.883	406	674
569487	4/0	532	0.53	210	RD	0.979	651	960
569427	350	893	0.67	230	RD	1.16	1084	1475
569428	500	1221	0.858	230	RD	1.35	1514	1970

All dimensions are nominal and subject to normal manufacturing tolerances
◊ Cable marked with this symbol is a standard stock item
† Ampacities based upon 2023 NEC Table 310.16. Also, see NEC sections 310.15 and 110.14(C) for additional requirements.
TBA stock codes are estimations only and actual product may vary. Please wait until a stock code is assigned to purchase connectors and/or fittings.

Copyright © 2026 Southwire Company, LLC. All Rights Reserved

UPDATED: April 30, 2025, 4:37 p.m.UTC REVISION: 1.000.007

Table 2 – Electrical and Engineering Data

Stock Number	Cond. Size	Min Bending Radius	Max Pull Tension	DC Resistance @ 25°C	AC Resistance @ 75°C	Inductive Reactance @ 60Hz	Allowable Ampacity At 60°C	Allowable Ampacity At 75°C	Allowable Ampacity At 90°C
	AWG/ Kcmil	inch	lb	Ω/1000ft	Ω/1000ft	Ω/1000ft	Amp	Amp	Amp
569424	2	3	530	0.172	0.227	0.045	95	115	130
569423	1/0	3.4	844	0.109	0.143	0.044	125	150	170
569425	2/0	3.5	1064	0.087	0.115	0.043	145	175	195
569487	4/0	3.9	1692	0.055	0.072	0.041	195	230	260
569427	350		2800	0.033	0.045	0.04	260	310	350
569428	500	6.8	4000	0.023	0.032	0.039	320	380	430

Copyright © 2026 Southwire Company, LLC. All Rights Reserved