

CU 600V XLPE Shielded Servo Cable

Reduced Diameter Type TC-ER Variable Frequency Drive Cable, 600 Volts or 1000 Volts, Tinned Copper Conductors, Cross-linked Insulation Type XHHW-2 With Shielded Pair, Thermoplastic Elastomer Jacket, Rated 90°C Dry or Wet, -40°C Cold Impact, Identification Method 4. 1000 Volts Flexible Motor Supply. CSA CIC/TC FT4 Flame.

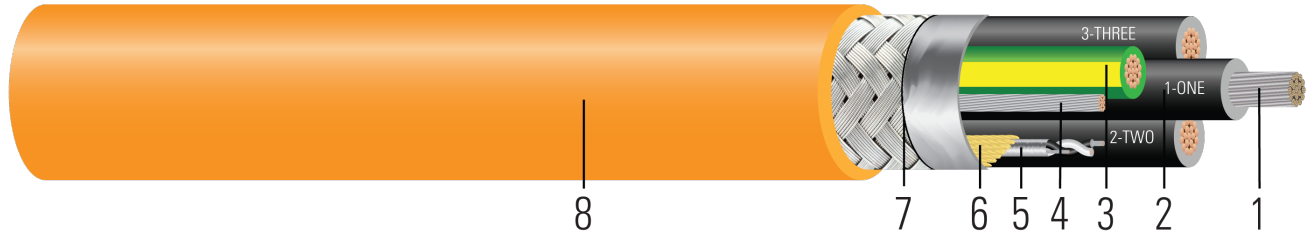


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

1. **Conductor:** Class K, flexible stranded tinned annealed copper per ASTM B33 and B174
2. **Insulation:** Cross linked insulation on all conductors (Type XHHW-2 on 14 AWG and larger)
3. **Ground:** One green ground with yellow Stripe cross linked insulation (size equal to phase conductor)
4. **Drain Wire:** Tinned copper drain wire two AWG sizes smaller than signal wire
5. **Twisted Shielded Pair:** 100% coverage aluminum/Mylar foil shield (color code: black, white)
6. **Shielding:** 100% coverage aluminum/Mylar/aluminum foil, overall 85% coverage tinned copper braid
7. **Jacket:** Black Thermoplastic Elastomer (TPE)

APPLICATIONS AND FEATURES:

Power supply cable for VFDs and motors, suitable for cable tray, conduit, raceways, exposed run (TC-ER) and conforming to NFPA 79 2018. Suitable for free air and direct burial. Its flexible design is ideal for use on operation processes in accordance with NEC® Articles 336, 501 and 502 including, but not limited to: fans, pumps, conveyors, compressors, elevators and lifts, extruders, crushers and presses, assembly lines, food and beverage, wind energy and data centers. Cable is rated for -40C Cold Bend and Impact. Multiple approvals for multiple applications.

SPECIFICATIONS:





- ASTM B33 Standard Specification for Tin-Coated Soft or Annealed Copper Wire
- ASTM B174 Standard Specification for Bunch-Stranded Copper
- UL 44 Thermoset-Insulated Wires and Cables
- UL 758 Standard for Appliance Wiring Material Style 20886
- UL 1277 Type TC-ER Standard Power and Control Cables (1000V 14AWG and Larger)
- UL 2277 Flexible Motor Supply Cable and Wind Turbine Tray Cable
- CSA C22.2 No. 210 Appliance wiring material products I/II A/B (Sizes 16 - 8AWG)
- CSA C22.2 No.230 Tray Cables - Rated TC
- CSA C22.2 No. 239 Control and instrumentation cables
- **CE/RoHS-2 – The CE Marking has been applied solely to express the conformance to the material restrictions identified in the RoHS-2 (2011/65/EU) Directive**
- NFPA 79 Electrical Standard for Industrial Machinery
- Made in America: Compliant with both Buy American and Buy America Act (BAA) requirements per 49 U.S.C. § 5323(j) and the Federal Transit Administration Buy America requirements per 49 C.F.R. part 661

SAMPLE PRINT LEGEND:

{SQFTG} SOUTHWIRE{R} XX AWG (XX{mm2}) X/C + XX AWG (XX{mm2}) X PR VFD XHHW-2 TYPE TC-ER E75755 {UL} 1000V 90{D}C DRY 90{D}C WET SUN RES OIL RES I/II DIR BUR -40{D}C OR WTTC 1000V OR AWM 20886 105{D}C 1000V OR FLEXIBLE MOTOR SUPPLY CABLE 1000V -- LL90458 {CSA} CIC/TC 600V FT4 OR AWM I/II A/B 105{D}C 1000V -40{D}C FT4 -- {CE} ROHS-3 MADE IN USA

Table 1 – Weights and Measurements

| Cond. Size | Cond. Number | Strand Count | Diameter Over Conductor | Insul. Thickness | Ground | Drain Wire | Dia. Over Shield | Jacket Thickness | Approx. OD | Copper Weight | Approx. Weight | Jacket Color |
|------------|--------------|----------------|-------------------------|------------------|-----------|------------|------------------|------------------|------------|---------------|----------------|--------------|
| AWG/Kcmil | | No. of Strands | inch | mil | No. x AWG | No. x AWG | inch | mil | inch | lb/1000ft | lb/1000ft | |
| 16 | 3 | 26 | 0.059 | 30 | 1 x 16 | 1x20 | 0.420 | 45 | 0.513 | 92 | 123 | OE |
| 14 | 3 | 41 | 0.071 | 45 | 1 x 14 | 1x18 | 0.503 | 60 | 0.627 | 109 | 233 | OE |
| 12 | 3 | 65 | 0.094 | 30 | 1 x 12 | 1x16 | 0.492 | 60 | 0.616 | 158 | 261 | OE |
| 10 | 3 | 105 | 0.117 | 30 | 1 x 10 | 1x14 | 0.553 | 60 | 0.677 | 233 | 344 | OE |
| 8 | 3 | 168 | 0.153 | 45 | 1 x 8 | 1x12 | 0.696 | 60 | 0.820 | 367 | 526 | OE |

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item

Table 2 – Electrical and Engineering Data

| Cond. Size | Cond. Number | Min Bending Radius | Max Pull Tension | DC Resistance @ 25°C | AC Resistance @ 75°C | Capacitive Reactance @ 60Hz | Inductive Reactance @ 60Hz | Allowable Ampacity At 75°C | Allowable Ampacity At 90°C |
|------------|--------------|--------------------|------------------|----------------------|----------------------|-----------------------------|----------------------------|----------------------------|----------------------------|
| AWG/Kcmil | | inch | lb | Ω/1000ft | Ω/1000ft | MΩ*1000ft | Ω/1000ft | Amp | Amp |
| 16 | 3 | 6.9 | 61 | 4.487 | 5.406 | 0.065 | 0.033 | - | 18 |
| 14 | 3 | 7.5 | 98 | 2.814 | 3.391 | 0.057 | 0.058 | 20 | 25 |
| 12 | 3 | 7.7 | 156 | 1.774 | 2.137 | 0.047 | 0.054 | 25 | 30 |
| 10 | 3 | 8.8 | 249 | 1.111 | 1.339 | 0.040 | 0.050 | 35 | 40 |
| 8 | 3 | 10.8 | 396 | 0.715 | 0.861 | 0.040 | 0.052 | 50 | 55 |

* Ampacities based upon 2023 NEC Table 310.16. See NEC sections 310.15 and 110.14(C) for additional requirements.

