



# Multi-Conductor CU or TCU 600 V FR-XLPE AL Foil Shield TCU Drain Wire Thermoset CPE-TS Jacket Control or Power Cable Color Method 1 Table 1

600 Volt Copper or Tinned Copper, Fire Retardant Cross-Linked Polyethylene (FR-XLPE) Insulation Aluminum Foil Shield, Tinned Copper Drain Wire, Thermoset Chlorinated Polyethylene (CPE-TS) Jacket. Sunlight Resistant - For Direct Burial. Conductor Identification Method 1 Table 1

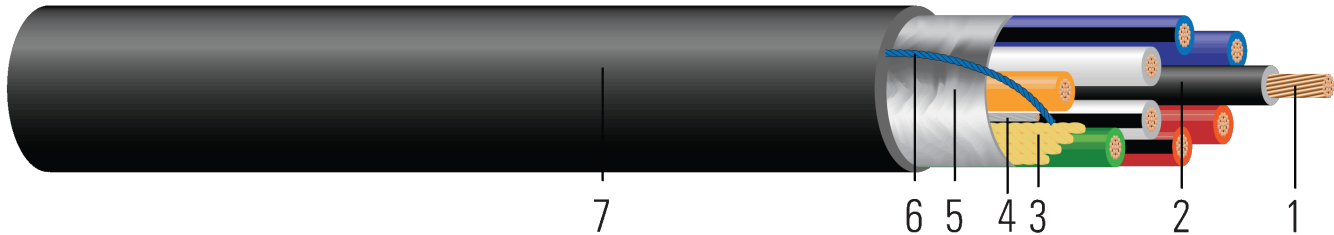


Image not to scale. See Table 1 for dimensions.

## CONSTRUCTION:

1. **Conductor:** Class B compressed stranded bare or tinned copper per ASTM B3 or B33 and ASTM B8
2. **Insulation:** Fire Retardant Cross-Linked Polyethylene (FR-XLPE) Type XHHW-2 for size 14 AWG and larger when UL listed
3. **Filler:** Polypropylene or paper filler
4. **Drain Wire:** 22 AWG tinned copper drain wire per ASTM B33
5. **Shield:** 100% coverage aluminum/polyester foil shield
6. **Rip Cord:** Rip cord for ease of jacket removal
7. **Overall Jacket:** Black Thermoset Chlorinated Polyethylene (CPE-TS)

## APPLICATIONS AND FEATURES:

Southwire's 600 Volt control cables are suited for use in wet and dry areas, conduits, ducts, troughs, trays, direct burial, aerial supported by a messenger, and where superior electrical properties are desired. These cables are capable of operating continuously at the conductor temperature not in excess of 90°C for normal operation in wet and dry locations, 130°C for emergency overload, and 250°C for short circuit conditions. UL rated construction can be used in Class I, II, and III, Division 2 hazardous locations per NEC Article 501 and 502. UL rated constructions with 3 or more conductors are listed for exposed runs (TC-ER) per NEC 336.10.

## SPECIFICATIONS:

- ASTM B3 Soft or Annealed Copper Wire
- ASTM B8 Concentric-Lay-Stranded Copper Conductors
- ASTM B33 Standard Specification for Tin-Coated Soft or Annealed Copper Wire
- UL 44 Thermoset-Insulated Wires and Cables
- UL 1277 Electrical Power and Control Tray Cables
- ICEA S-58-679 Control Cable Conductor Identification Method 1 Table 1
- ICEA S-73-532 Standard for Control, Thermocouple Extension and Instrumentation Cables
- ICEA S-95-658 (NEMA WC70) Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy





---

**SAMPLE PRINT LEGEND:**

**UL Listed**

{SQFTG} SOUTHWIRE® E75755 {UL} TYPE TC or TC-ER XX AWG CU XX/C XHHW-2 CDRS E1 22 AWG TIN CU DW  
SHIELDED 90°C WET OR DRY CPE-TS JKT 600V SUN RES OIL RES II DIRECT BURIAL

**Non UL Listed**

{SQFTG} SOUTHWIRE® XX AWG CU X/C FR-XLPE CDRS E1 SHIELDED 90°C WET OR DRY CPE-TS JKT 600V SUN RES




**Table 1 – Physical and Electrical Data**

Stock Number	Cond. Size	Cond. Number	Cond. Strands	Insulation Color	Insul. Thickness	Jacket Thickness	Approx. OD	Approx. Weight	DC Resistance @ 25°C	AC Resistance @ 75°C	Inductive Reactance	Min Bending Radius	Allowable Ampacity 75°C	Allowable Ampacity 90°C	Jacket Color
	AWG	No.	strands		mil	mil	inch	lb / 1000ft	Ω /1000ft	Ω /1000ft	Ω/1000ft	inch	Amp	Amp	
16 AWG															
606948	16	2	19	BK, WE	25	45	0.338	61	4.181	5.037	0.033	1.4	-	18	Black
606949 <sup>^</sup>	16	4	19	BK, WE RD, BE	25	45	0.384	88	4.181	5.037	0.033	1.5	-	14	Black
661436	16	7	7	BK, WE, RD, GN, OE, BE, WE/BK	25	45	0.440	129	4.181	5.037	0.033	1.8	-	12	Black
660952	16	12	7	BK, WE, RD, GN, OE, BE, WE/BK, RD/BK, GN/BK, OE/BK	25	60	0.598	220	4.181	5.037	0.033	2.4	-	9	Black
627666	16	12	7	BK, WE, RD, GN, OE, BE, WE/BK, RD/BK, GN/BK, OE/BK	25	60	0.599	219	4.181	5.037	0.033	2.4	-	9	Black
12 AWG															
606943 <sup>^</sup>	12	2	7	BK, WE	30	45	0.420	102	1.662	2.002	0.054	1.7	25	30	Black
628738	12	4	7	BK, WE, RD, BE	30	45	0.478	160	1.662	2.002	0.054	1.9	20	24	Black
606942 <sup>^</sup>	12	12	7	BK, WE, RD, GN, OE, BE, WE/BK, RD/BK, GN/BK, OE/BK	30	60	0.763	425	1.662	2.002	0.054	3.1	12	15	Black
10 AWG															
606935 <sup>^</sup>	10	2	7	BK, WE	30	45	0.471	134	1.040	1.253	0.050	1.9	35	40	Black
620766 <sup>^</sup>	10	2	7	BK, WE	30	45	0.471	140	1.040	1.253	0.050	1.9	35	40	Black
628732	10	4	7	BK, WE, RD, BE	30	60	0.572	247	1.040	1.253	0.050	2.3	28	32	Black
606936 <sup>^</sup>	10	4	7	BK, WE, RD, GN	30	60	0.577	240	1.040	1.253	0.050	2.3	28	32	Black

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item

<sup>^</sup> UL listed part number. 16 AWG can only be Type TC rated. 2/C constructions are Type TC rated.

\* Ampacities based upon 2023 NEC Table 310.16 and do not take into account the overcurrent protection limitations in NEC 240.4(D) of 15 Amps for 14 AWG CU, 20 Amps for 12 AWG CU, and 30 Amps for 10 AWG CU (independent of the conductor temperature rating and stranding if size is present in table). Also, see NEC sections 310.15 and 110.14(C) for additional requirements.

\* Ampacities have been adjusted for more than Three Current-Carrying Conductors.

TBA stock codes are estimations only and actual product may vary. Please wait until a stock code is assigned to purchase connectors and/or fittings.

