



Duplex Copper XLPE Service Drop Neutral - Messenger

Copper Conductors With Crosslinked Polyethylene Insulation.

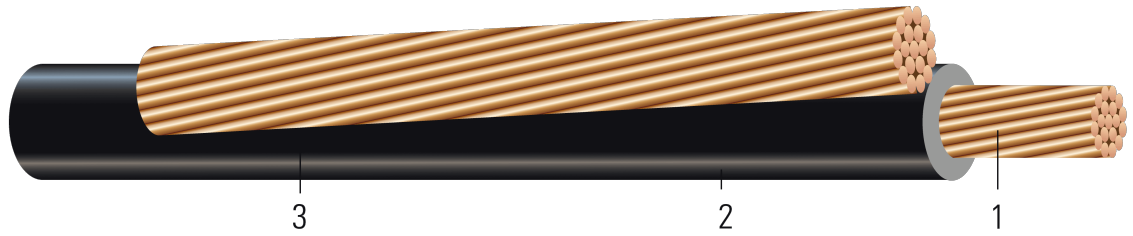


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

1. **Conductor:** Conductors are stranded, compressed copper
2. **Insulation:** Cross Linked Polyethylene (XLPE)
3. **Messenger:** Hard Drawn Copper

APPLICATIONS AND FEATURES:

Primarily used for 120 volt overhead service applications such as street lighting, outdoor lighting, and temporary service for construction. To be used at voltages of 600 volts phase-to-phase or less and at conductor temperatures not to exceed 90°C for crosslinked polyethylene (XLP) insulated conductors.

SPECIFICATIONS:

- ASTM B1 Hard-Drawn Copper
- ASTM B3 Soft or Annealed Copper Wire
- ASTM B8 Concentric-Lay-Stranded Copper Conductors
- ICEA S-76-474 Standard for Neutral-Supported Power Cable Assemblies with Weather-Resistant Extruded Insulation Rated 600V



Table 1 – Weights and Measurements

| Stock Number | Code Word | Phase Cond. Size | Phase Strand | Dia. Over Phase Conductor | Phase Insul. Thickness | Dia. Over Phase Insulation | Neutral Cond. Size | Neutral Strand | Approx. OD | Approx. Weight |
|--------------|-----------|------------------|--------------|---------------------------|------------------------|----------------------------|--------------------|----------------|------------|----------------|
| | | AWG/Kcmil | No. | inch | mil | inch | AWG/Kcmil | No. | inch | lb/1000ft |
| TBA | Kappa | 8 | 7 | 0.141 | 30 | 0.201 | 8 | 7 | 0.404 | 182 |

All dimensions are nominal and subject to normal manufacturing tolerances
TBA stock codes are estimations only and actual product may vary. Please wait until a stock code is assigned to purchase connectors and/or fittings.

Table 2 – Electrical and Engineering Data

| Code Word | Phase Cond. Size | Neutral Rated Breaking Strength | DC Resistance @ 25°C | AC Resistance @ 75°C | Inductive Reactance @ 60Hz | GMR | Allowable Ampacity In Air 75/90°C |
|-----------|------------------|---------------------------------|----------------------|----------------------|----------------------------|-------|-----------------------------------|
| | AWG/Kcmil | lb | Ω/1000ft | Ω/1000ft | Ω/1000ft | ft | Amp |
| Kappa | 8 | 777 | 0.653 | 0.786 | 0.052 | 0.004 | 70 / 80 |