



## 3/C CU 600 V FR-XLPE Thermoplastic CPE-TP Jacket Power Cable. Color Method 1 Table 1

Power Cable 600 Volt Three Conductor Copper, Fire Retardant Cross-Linked Polyethylene (FR-XLPE) insulation With Ground Thermoplastic Chlorinated Polyethylene (CPE-TP) Jacket. Conductor Identification Method 1 Table 1

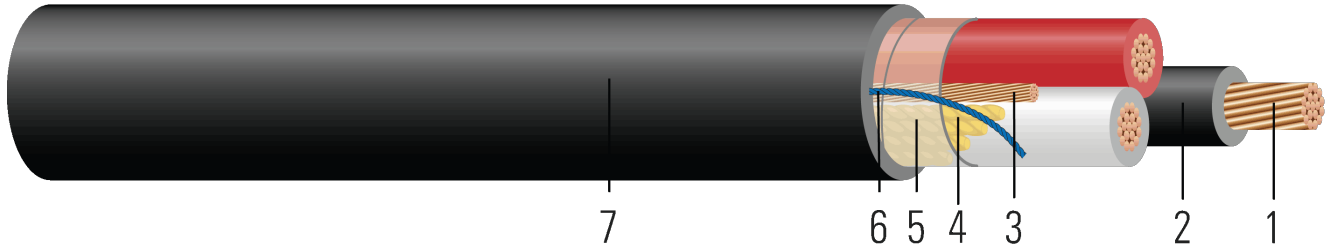


Image not to scale. See Table 1 for dimensions.

### CONSTRUCTION:

- Conductor:** Class B compressed stranded bare per ASTM B3, ASTM B8
- Insulation:** Fire Retardant Cross-Linked Polyethylene (FR-XLPE)
- Filler:** Paper or Polypropylene filler
- Ground:** Bare ground
- Binder:** Polyester flat thread binder tape
- Rip Cord:** Rip cord for ease of jacket removal
- Overall Jacket:** Black Thermoplastic Chlorinated Polyethylene (CPE) Jacket

### APPLICATIONS AND FEATURES:

Southwire's 600 Volt control cables are suited for use in wet and dry areas, conduits, ducts, troughs, trays, direct burial, aerial supported by a messenger, and where superior electrical properties are desired. These cables are capable of operating continuously at the conductor temperature not in excess of 90°C for normal operation in wet and dry locations, 130°C for emergency overload, and 250°C for short circuit conditions.

### SPECIFICATIONS:

- ASTM B3 Soft or Annealed Copper Wire
- ASTM B8 Concentric-Lay-Stranded Copper Conductors
- ICEA S-95-658 (NEMA WC70) Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy

### SAMPLE PRINT LEGEND:

{SQFTG} SOUTHWIRE{R} MASTER-DESIGN X AWG CU 3/C FR-XLPE CDRS E1 GW 90{D}C WET OR DRY CPE-TP JKT 600V  
SUN RES DIRECT BURIAL

**Table 1 – Weights and Measurements**

Stock Number	Cond. Size	Cond. Number	Strand Count	Diameter Over Conductor	Insul. Thickness	Insulation Color	Ground	Jacket Thickness	Approx. OD	Copper Weight	Approx. Weight
	AWG/ Kcmil		No. of Strands	inch	mil		No. x AWG	mil	inch	lb/1000ft	lb/1000ft
628694	8	3	7	0.141	45	BK, RD, WE	1 x 10	60	0.640	186	317

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item

**Southwire Company, LLC | One Southwire Drive, Carrollton, GA 30119 | [www.southwire.com](http://www.southwire.com)**

Copyright © 2025 Southwire Company, LLC. All Rights Reserved

UPDATED: Dec. 31, 2024, 11:09 p.m. UTC REVISION: 1.000.020



TBA stock codes are estimations only and actual product may vary. Please wait until a stock code is assigned to purchase connectors and/or fittings.

**Table 2 – Electrical and Engineering Data**

Stock Number	Cond. Size	Cond. Number	Min Bending Radius	DC Resistance @ 25°C	AC Resistance @ 75°C	Inductive Reactance @ 60Hz	Allowable Ampacity At 75°C	Allowable Ampacity At 90°C
	AWG/Kcmil		inch	Ω/1000ft	Ω/1000ft	Ω/1000ft	Amp	Amp
628694	8	3	2.6	0.653	0.786	0.052	50	55

\* Ampacities based upon 2023 NEC Table 310.16 and do not take into account the overcurrent protection limitations in NEC 240.4(D) of 15 Amps for 14 AWG CU, 20 Amps for 12 AWG CU, and 30 Amps for 10 AWG CU (independent of the conductor temperature rating and stranding if size is present in table). Also, see NEC sections 310.15 and 110.14(C) for additional requirements.

\* Ampacities have been adjusted for more than Three Current-Carrying Conductors.

\* Inductive impedance is based on non-ferrous conduit with one diameter spacing center-to-center.