



Broadband Coax - RG8, RG62, RG174, RG213, RG214, RG223

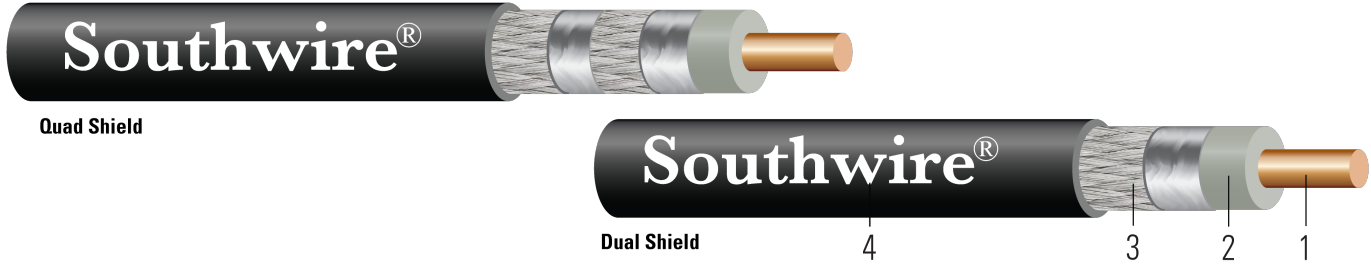


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

1. **Conductor:** Bare copper or copper clad steel
2. **Insulation:** Polyethylene
3. **Shield:** Copper braid shielded
4. **Jacket:** Polyvinyl Chloride PVC.

APPLICATIONS AND FEATURES:

CATV Applications for distributing television signals, using "F" connectors, ALUMINUM BRAID CCTV Applications for surveillance; Connecting security cameras, DVR or monitor using "BNC" connectors, COPPER BRAID



Table 1 – Physical and Electrical Data

Stock Number	Cable Type	Rating	Cond. Size	Cond. Number	Cond. Type	Cond. Strands	Insul. Thickness	Jacket Thickness	Approx. OD	Approx. Weight	Shield Type	Application
			AWG	No.		strands	mil	mil	inch	lb /1000ft		
RG8												
991020	RG8	CL2, AWM Style 1354,	17	1	BC	Solid	45	30	0.240	37	Dual	CATV
991007	RG8		9.5	1	BC	Solid	40	45	0.420	103	Dual	CATV
RG62												
92002	RG62	CL2, AWM Style 1478,	22	1	CCS	Solid	25	30	0.234	30	Dual	CATV
RG174												
991069	RG174	AWM Style 1354, UL 1	26	1	CCS	7	20	10	0.100	8	Tinned Cu Braid	CATV
RG213												
991071	RG213	CL2X, AWM Style 1354	12.5	1	BC	Solid	95	45	0.407	106	Cu Braid	CATV
RG214												
991075	RG214	CL2X, AWM Style 1354	12.7	1	SCC	Solid	95	40	0.425	138	Quad	CATV
RG223												
991079	RG223	CL2X, AWM Style 1354	19	1	SCC	Solid	40	25	0.212	37	Quad	CATV

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item