Steel Armored Thermostat Type MC

18 AWG TFN/TEWN Insulated Singles. Green Insulated Ground. UL Listed. 600 Volts. Rated VW-1. Steel Interlocked Armor.

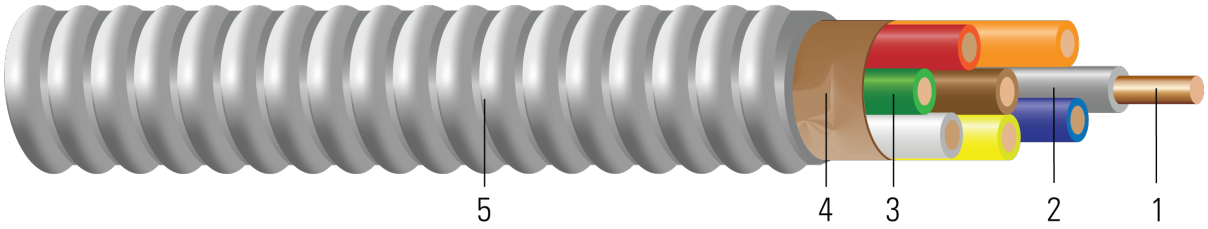


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

1. **Conductor:** Solid soft drawn copper per ASTM B3
2. **Insulation:** All phases are insulated with Polyvinyl Chloride with Nylon Sheath Type TFFN
3. **Ground:** Green insulated ground. Polyvinyl Chloride with Nylon Sheath Type TFFN
4. **Binder:** Paper tape
5. **Armor:** Steel Interlocked Armor

APPLICATIONS AND FEATURES:

Southwire Steel Armored Thermostat Type MC Cable is suitable for use as follows:

- Signal, control, branch, feeder and service power distribution in commercial, industrial, institutional, and multi-residential buildings.
- Fished or embedded in plaster.
- Concealed or exposed installations.
- Environmental air-handling spaces per NEC 300.22 (C).
- Places of Assembly per NEC 518.4 and theaters per NEC 520.5.
- Installation in cable tray and approved raceways.
- Under raised floors for information technology equipment conductors and cables per NEC Article 645
- Class I Div. 2, Class II Div 2, & Class III Div. 1 Hazardous Locations.

Southwire Type MC Cable - meets or exceeds the following requirements:

- UL Online Product Guide Info - Metal-Clad Cable (PJAZ) (www.ul.com)
- Federal Specification A-A59544 (formerly J-C-30B)
- NFPA 70 (National Electrical Code), Article 330
- Listed for use in UL 1, 2 and 3 Hour Through Penetration Firestop Systems

SPECIFICATIONS:

- ASTM B3 Soft or Annealed Copper Wire
- UL 66 Fixture Wire
- UL 1569 Metal-Clad Cables
- UL 1685 FT4 Vertical-Tray Fire Propagation and Smoke Release Test
- IEEE 1202 FT4 Flame Test (70,000) BTU/hr Vertical Tray Test
- RoHS-2 (European Directive 2011/65/EU)

Copyright © 2026 Southwire Company, LLC. All Rights Reserved

UPDATED: Oct. 24, 2025, 8:28 p.m.UTC REVISION: 1.000.011

- Buy American: Compliant with Buy American Requirements, found in 49 U.S.C. § 5323(j); specify "Made in the USA Only!" when ordering to ensure your project receives American made products.
- VW-1 (Vertical-Wire) Flame Test

SAMPLE PRINT LEGEND:

E96627 {UL} TYPE MC AWG XXTHHN OR THWN CDRS FOR USE IN CABLE TRAYS 600 VOLTS

Table 1 – Weights and Measurements

Stock Number	Cond. Size	Conductor Number	Color	Diameter Over Conductor	Conductor Stranding	Insulation Thickness	Diameter Over Armor	Copper Weight	Overall Weight
	AWG/ Kcmil			inch		mils	inch	lbs/1000ft	lbs/1000ft
18 AWG | 1 Strands									
553173◊	18	2	BK, WE	0.04	1	15	0.596	10	78
553174◊	18	3	BK, RD, WE	0.04	1	15	0.596	15	84
553170◊	18	4	BK, RD BE, WE	0.04	1	15	0.63	20	97
553171◊	18	4	BK, RD BE, WE, GN	0.04	1	15	0.652	25	110
553169◊	18	5	BK, RD BE, WE, YW, GN	0.04	1	15	0.652	30	117
554763◊	18	8	BK, RD BE, WE, YW, BN, OE, GN	0.04	1	15	0.702	40	139

All dimensions are nominal and subject to normal manufacturing tolerances
◊ Cable marked with this symbol is a standard stock item
Note: Conductor number = number of phase conductors plus neutral. Does not include green ground.
TBA stock codes are estimations only and actual product may vary. Please wait until a stock code is assigned to purchase connectors and/or fittings.

Table 2 – Electrical and Engineering Data

Cond. Size	Conductor Number	Min. Bend Radius	DC Resistance at 25°C	AC Resistance at 75°C	Inductive Reactance @ 60Hz	Allowable Ampacity Raceway 75°C	Allowable Ampacity Raceway 90°C
AWG/ Kcmil		Inches	Ω/1000ft	Ω/1000ft	Ω/1000ft	Amp	Amp
18 AWG | 1 Strands							
18	2	2.7	6.669	8.277	0.036	-	14
18	3	2.7	6.669	8.277	0.036	-	14
18	4	2.9	6.669	8.277	0.036	-	11
18	4	3.1	6.669	8.277	0.036	-	11
18	5	3.1	6.669	8.277	0.036	-	11
18	8	3.4	6.669	8.277	0.036	-	10

* Ampacities based upon 2023 NEC Table 310.16 and do not take into account the overcurrent protection limitations in NEC 240.4(D) of 15 Amps for 14 AWG CU, 20 Amps for 12 AWG CU, and 30 Amps for 10 AWG CU (independent of the conductor temperature rating and stranding if size is present in table). Also, see NEC sections 310.15 and 110.14(C) for additional requirements.
* Ampacities have been adjusted for more than Three Current-Carrying Conductors.

Copyright © 2026 Southwire Company, LLC. All Rights Reserved