



# CU 600/1000V XLPE Insulation 50% Ground AIA PVC Jacket XHHW-2. CT Rated -Sunlight Resistant - For Direct Burial - Silicone Free

Type MC Power Cable 600Volt Four Conductor Copper, Cross Linked Polyethylene (XLPE) insulation XHHW-2 Three Bare CU 50% Ground Aluminum Interlocked Armor (AIA), Polyvinyl Chloride (PVC) Jacket. Silicone Free.

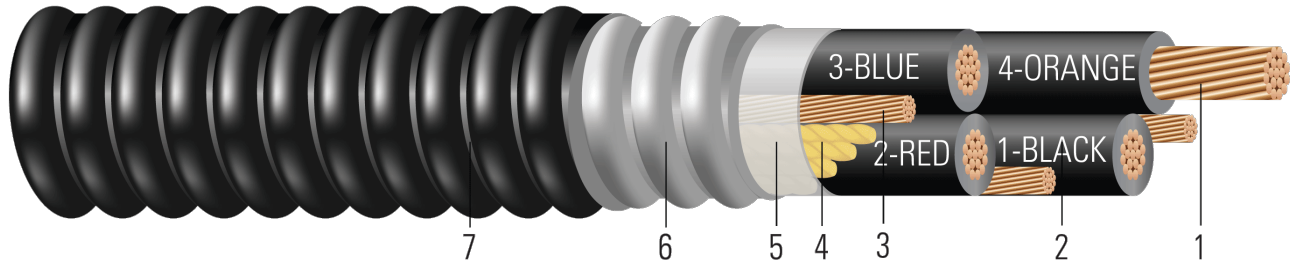


Image not to scale. See Table 1 for dimensions.

## CONSTRUCTION:

- Conductor:** Class B compressed stranded bare copper per ASTM B3 and ASTM B8
- Insulation:** Cross Linked Polyethylene (XLPE) Type XHHW-2
- Grounding Conductor:** Class B compressed stranded bare copper per ASTM B3 and ASTM B8
- Filler:** Paper filler
- Binder:** Polypropylene tape
- Armor:** Aluminum Interlocked Armor (AIA)
- Overall Jacket:** Polyvinyl Chloride (PVC) Jacket

## APPLICATIONS AND FEATURES:

Southwire's 600 Volt Type MC power cables are suited for use in wet and dry areas, conduits, ducts, troughs, trays, direct burial, aerial supported by a messenger, and where superior electrical properties are desired. These cables are capable of operating continuously at the conductor temperature not in excess of 90°C for normal operation in wet and dry locations, 130°C for emergency overload, and 250°C for short circuit conditions. For uses in Class I, II, and III, Division 2 hazardous locations per NEC Article 501 and 502. The ground is sized to 50% of the phase conductor with three separate bare grounds one in each interstecie between condutors. Silicone Free.

## SPECIFICATIONS:

- ASTM B3 Soft or Annealed Copper Wire
- ASTM B8 Concentric-Lay-Stranded Copper Conductors
- UL 44 Thermoset-Insulated Wires and Cables
- UL 1569 Metal-Clad Cables
- UL 1685 Vertical-Tray Fire Propagation and Smoke Release Test
- ICEA S-58-679 Control Cable Conductor Identification Method 3 (1-BLACK, 2-RED, 3-BLUE)
- ICEA S-95-658 (NEMA WC70) Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy

## SAMPLE PRINT LEGEND:

{SQFTG\_DUAL} SOUTHWIRE {UL} 4/C (XXX KCMIL) XXXmm<sup>2</sup> CU 65 MILS XLP 600 VOLTS GW 3 X 1 AWG CU TYPE MC FOR CT USE SUN. RES. DIRECT BURIAL 90°C USA -- {NOM}-ANCE Tipo MC XHHW-2 CT





**Table 1 – Weights and Measurements**

Stock Number	Cond. Size	Cond. Number	Strand Count	Diameter Over Conductor	Insul. Thickness	Ground	Dia. Over Armor	Jacket Thickness	Approx. OD	Copper Weight	Approx. Weight
	AWG/ Kcmil		No. of Strands	inch	mil	No. x AWG	inch	mil	inch	lb/1000ft	lb/1000ft
665399	1/0	4	19	0.361	55	3 x 6	1.381	50	1.487	1562	2058
TBA	2/0	4	19	0.405	55	3 x 6	1.458	50	1.558	1739	2250
TBA	3/0	4	19	0.456	55	3 x 4	1.682	60	1.802	2220	2858
665402	4/0	4	19	0.512	55	3 x 4	1.814	60	1.940	3029	3773
665410	250	4	37	0.558	65	3 x 4	1.964	60	2.090	3509	4343
TBA	350	4	37	0.661	65	3 x 2	2.226	60	2.346	4525	5565
952374	500	4	37	0.789	65	3 x 1	2.504	75	2.654	7020	8284
TBA	600	4	61	0.865	80	3 x 1/0	2.793	75	2.943	7683	9199
TBA	750	4	61	0.968	80	3 x 2/0	3.042	85	3.212	9605	11336

All dimensions are nominal and subject to normal manufacturing tolerances

◊ Cable marked with this symbol is a standard stock item

**Table 2 – Electrical and Engineering Data**

Stock Number	Cond. Size	Cond. Number	Min Bending Radius	Max Pull Tension	DC Resistance @ 25°C	AC Resistance @ 75°C	Capacitive Reactance @ 60Hz	Inductive Reactance @ 60Hz	Allowable Ampacity At 75°C	Allowable Ampacity At 90°C
	AWG/ Kcmil		inch	lb	Ω/1000ft	Ω/1000ft	MΩ*1000ft	Ω/1000ft	Amp	Amp
665399	1/0	4	10.4	2703	0.102	0.122	0.017	0.044	120	136
TBA	2/0	4	10.9	3407	0.081	0.097	0.016	0.043	140	156
TBA	3/0	4	12.6	4295	0.064	0.078	0.014	0.042	160	180
665402	4/0	4	13.6	5416	0.051	0.062	0.013	0.041	184	208
665410	250	4	14.6	6400	0.043	0.053	0.014	0.041	204	232
TBA	350	4	16.4	8960	0.031	0.039	0.012	0.040	248	280
952374	500	4	18.6	12800	0.022	0.029	0.010	0.039	304	344
TBA	600	4	20.6	15360	0.018	0.025	0.011	0.039	336	380
TBA	750	4	22.5	19200	0.014	0.022	0.010	0.038	380	428

\* Ampacities based upon 2023 NEC Table 310.16. See NEC sections 310.15 and 110.14(C) for additional requirements.

\* Ampacities have been adjusted for more than Three Current-Carrying Conductors.

